


## Features

Vibrantly and consistent printing quality  
 Short term use  
 Great cost-effective  
 Glossy surface available  
 Best suited for indoor/outdoor front-lit displays

## Applications

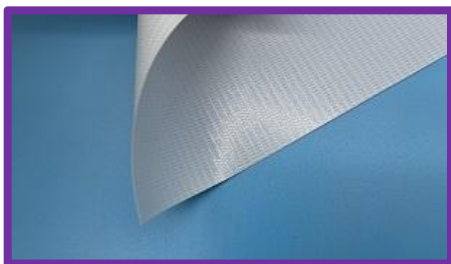

## Technical Data Sheet

| Item Code                   |              | FBLFGY2301812240 | Test Method      |
|-----------------------------|--------------|------------------|------------------|
| Base Fabric                 |              | 200D*300D 18*12  | DIN EN ISO2060   |
| Weight (GSM)                |              | 240              | DIN EN ISO2286-2 |
| Tensile Strength            | Warp (N/5cm) | 500              | ISO527/3:1995    |
|                             | Weft (N/5cm) | 480              | ISO527/3:1995    |
| Tear Strength               | Warp (N/5cm) | 60               | ISO4674/1:2003   |
|                             | Weft (N/5cm) | 40               | ISO4674/1:2003   |
| Adhesion Strength           |              | N/A              | DIN53357:1982    |
| Temperature                 |              | -30°C/+70°C      | ISO13934-1:1999  |
| RF Weldable (Heat Sealable) |              | YES              | DIN53354         |
| Flame Retardant             |              | B1/M1/M2/NFPA701 |                  |

Information contained in this document is based on our general experience and is given in good faith. But we are unable to accept responsibility in respect to factors which are outside our knowledge or control.

## Ink Printability

SOLVENT

ECO-SOLVENT

UV

LATEX

SCREEN PRINTING



Add: Room 912, No.3 Building, Shangdong Business Center, Haizhou District,  
 Haining, Zhejiang, China  
 Tel: +86-573-80776996 Fax: +86-573-80776998  
 Mob/Skype/Wechat: +86-15858322153  
<mailto:contact@hncomax.com> <https://www.hncomax.com>

